



TC5X-HC Configuration & Accessories Guide



TC5X-HC Series Healthcare Accessory Ecosystem

New 2-slot cradle
CRD-TC5X2SETH-02
Charges one mobile computer and one spare battery simultaneously

ShareCradle System
1-slot charge (CRD-TC51-HC1SC-01)

5-Slot Charge Only
CRD-TC51-HC5SC-01

4-Slot Spare Battery Charger
SAC-TC51-HC4SC-01

Workstation Cradle
CRD-TC5X-1SWS-01

HealthCare Rotating Carrying Clip
SG-TC5X-CLIPHC1-01

USB Charge Cable
CBL-TC51-USB1-01

New metal stylus with mesh tip
SG-STYLUS-TCX-MTL-03

Soft Holster
SG-TC51-HLSTR1-01

Stylus
SG-TC7X-STYLUS-03

Bluetooth Headset
HS3100-OTH

Carry Strap
SG-TC5X-HSTRAPHC1-01

Batteries / Battery Charging Accessories

Spare Battery Charging Options




TC5X Healthcare white 4-slot battery charger. Includes Power Supply and DC cable.

[SAC-TC51-HC4SC-01](#)

Included Power Supply and DC Cable for Battery Charger:



DC cable for Level 6 power supply PWR-BGA12V50W0WW (12 VDC, 4.16A), 1.8 M length. (PN: CBL-DC-388A1-01)



Power supply for 4-slot battery charger: 100-240 VAC, 12VDC, 4.16A. (PN: PWR-BGA12V50W0WW) **Requires:** Country specific AC grounded line cord.

US AC Line Cord



US AC line cord, 7.5 feet long, grounded, three wire for power supplies

[23844-00-00R](#)

Spare Li-ion Battery



TC5X Healthcare PowerPrecision+ Spare Lithium-Ion battery, 4.4v.

[BTRY-TC51-43HC1-01](#)

Also available as a 10-pack

PN: [BTRY-TC51-43HC1-10](#)



New

Bluetooth Beacon Battery for TC5X Healthcare PowerPrecision+ Spare Lithium-Ion battery, 4.4v.

[BTRY-TC5x-BTBCN4HC-01](#)

Single Slot Charging Options TC5X

Single-Slot Cradles



ShareCradle, Charge & USB Communication

CRD-TC51-HC1SC-01: TC5X Healthcare Single-Slot Charge/USB ShareCradle Kit. Charges and allows USB communication to one device. Includes PWR-BGA12V50W0WW and DC cable CBL-DC-388A1-01. Country Specific AC Line Cord and 25-124330-01R Micro-USB Cable, Sold Separately.

KT-TC51-ETH1-01: USB-Ethernet Adapter kit for single-slot ShareCradle. Includes Ethernet module (MOD-MT2-EU1-01) to provide Ethernet communication (10/100 Mbps) and a housing bracket to secure the Ethernet module to cradle.



NEW: Single slot cradle with 2nd spare battery charging slot kit

CRD-TC5X-2SETH-02: Kit, 1-slot and 1 Spare Battery Ethernet & USB Communications Cradle for TC5X terminals, Includes Power Supply PWR-BGA12V50W0WW and DC cable CBL-DC-388A1-01. Order Country Specific AC Line Cord, Sold Separately.

Included with Single-Slot cradle



Front Back

Power supply for single-slot cradle: 100-240 VAC, 12VDC, 4.16A. (PN: PWR-BGA12V50W0WW)

Requires: Country specific AC grounded line cord.



DC cable for power supply PWR-BGA12V50W0WW. (12 VDC, 4.16A) 1.8m length. (PN: CBL-DC-388A1-01)

Additional accessories for Single-Slot cradle



23844-00-00R

US AC line cord, 7.5 feet long, grounded, three wire for power supplies.



25-124330-01R

Micro-USB to USB Cable for single-slot cradle communication.

5-Slot Charging Options TC5X

5-Slot ShareCradle



CRD-TC51-HC5SC-01

TC5X Healthcare White 5-Slot Charge Only ShareCradle, charges up to five devices. Includes power supply PWR-BGA12V108W0WW and DC cable CBL-DC-381A1-01.



CRD-TC-51-5SC4B-01

TC5X 5-Slot Charge Only ShareCradle with 4-Slot Spare Battery Charger, charges up to 4 devices and up to 4 spare batteries. Includes power supply PWR-BGA12V108W0WW and DC cable CBL-DC-381A1-01.



CRD-TC51-5SCHG-10

TC5X Healthcare 5-Slot Charge Only ShareCradle, charges up to five devices. Includes power supply PWR-BGA12V108W0WW and DC cable CBL-DC-381A1-01.

Included with 5-Slot ShareCradle



Power supply for 5-slot cradle: 100-240 VAC, 12VDC, 9A. (PN: PWR-BGA12V108W0WW)
Requires: Country specific AC grounded line cord (sold separately).



DC cable provides power from the power supply to 5-slot charge-only and Ethernet cradles.(PN: CBL-DC-381A1-01)

Country specific AC line cord sold separately



23844-00-00R

US AC line cord, 7.5 feet long, grounded, three wire for power supplies.

Notes:

1. Spare cradle cups are available as service spare parts.
2. ** Primary selection and can be built as pictured in black



Healthcare Hand Strap

- Supports nurses with easy to hold and carry option
- Enables full access to battery
- Backward compatible across full TC5X family

Duress button ID

Silicone rubber hand strap with Zebra Logo, indicating top/bottom orientation


Able to use current cradles (Requires removal of cup shim) with hand strap installed.

Or easily remove the hand strap for battery access and charging.



SG-TC5X-HSTRAPHC1-01

Workstation Docking Cradle

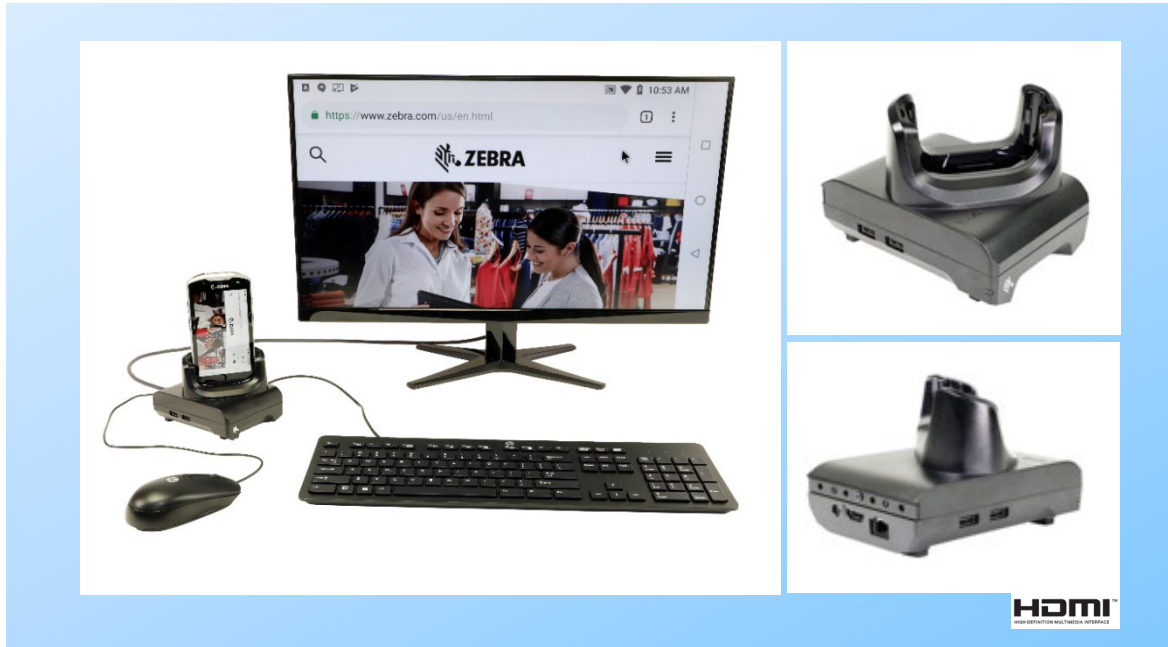


The TC5X Workstation Docking Cradle is an enhanced single-slot charging cradle with additional ports for HDMI, Ethernet, and 4 USB ports for Keyboard, Mouse & spares, that enables a TC5X device to be used as a workstation computer when connected to an HDMI monitor, keyboard and mouse. The Workstation Docking Cradle supports all TC5X Mobile Computers including the TC51/TC51-HC, TC56, TC52/TC52x/TC52x-HC and TC57/TC57x. It also includes a Kensington port to secure the cradle to a desk location or, alternatively, the cradle can be locked down to a desktop, shelf or rack with screw-down options.

CRD-TC5X-1SWS-01: TC5X Workstation Docking Cradle Kit with Std Cup, HDMI, Ethernet and multiple USB Ports. Kit includes Cradle (CRD-TC5X-1SWS1-01), power supply (i.e. PWR-BGA12V50W0WW) and DC cable (i.e. CBL-DC-388A1-01). Country specific AC line cord sold separately.

**Note: Software updates may be required to support functionality including the Displaylink™ Presenter driver available on the Google Play™ store, and the appropriate Zebra BSP or LG updates.*

Included with Workstation Cradle Kit



Power supply for single-slot cradle: 100-240 VAC, 12VDC, 4.16A.
(PN: PWR-BGA12V50W0WW)
Requires: Country specific AC grounded line cord (not included).



DC cable for power supply
PWR-BGA12V50W0WW.
(12 VDC, 4.16A) 1.8m length.
(PN: CBL-DC-388A1-01)

Additional accessories



23844-00-00R


US AC line cord, 7.5 feet long, grounded, three wire for power supplies.

Notes:

1. All TC5X cradles accommodate devices with or without the rugged boot.
2. Each cradle cup has an insert that must be removed prior to inserting the TC5X device with Rugged Boot attached.
3. Spare cradle cups are available as service spare parts.
4. This cradle does not include a micro-USB port.

TC5X-HC Additional Accessories

Spare I/O Connector



ADP-TC51-RGIO1-03

Spare/replacement TC5X 7-pin I/O connector. 3-pack

Soft Holster



SG-TC51-HLSTR1-01

TC5X soft holster for vertical orientation with open bucket design for easy insertion and removal. Features adjustable straps to accommodate hand strap, rugged boot and trigger handle configurations.

Stylus & Screen Protector



SG-TC7X-STYLUS-03

Stylus with coiled tether 3-pack. Made of conductive carbon-filled plastic material, optimized for enterprise durability.



KT-TC51-SCRNP1-01

TC5X Tempered Glass Screen Protector 3-pack.



NEW: SG-STYLUS-TCX-MTL-03

5" long Metal stylus with micro-knit hybrid mesh fiber tip; Passive stylus, Compatible with all TC5X devices & capacitive touch screen devices, Micro-Knit Hybrid Fiber Tip Stylus, 3 Pack

TC5X-HC Carrying Clip



New



SG-TC5X-CLIPHC1-01

TC51 Healthcare Carrying Clip. Snaps on top of TC51-HC. Built with disinfectant-ready, healthcare grade plastic.

Cables / Adapters

Rugged Charge Cable



CBL-TC51-USB1-01

TC5X Rugged USB/Charge Cable. Accommodates TC5X with and without rugged boot.

Wall Charger – Power Supply



PWR-WUA5V12W0US

Power Supply-100-240 VAC, 5 V, 2.5 A with country specific plugs.